



PTZ IP Surveillance Camera Specifications

Image Sensor
Shape: PTZ
Sensor: CMOS
Sensor Size: 1/2.7 Inch Color CMOS SENSOR
Effective Pixels: 5mp
***Lens (mm):** 0.1
Lens: Zoom
Viewing Angle (°): 83
Record Resolution (mp): 1080P (1920 x 1080)
Video Image/Audio Setting
Compression: H.264
Audio Output: Built-In Speaker
Audio Input: Built-in Mic
Communication&Interface
Network Interface: RJ-45 10/100mb Self Adaptable
Ethernet Slot
P2P: Yes
Alarm Action: Sound Alarm, Video Record
Connection: Wired and/or Wireless
Physical/Environment
Suggested Space Fit: Shop, Home, Garage etc
Location: Outdoor
Environment: Outdoor
Humidity (%RH): 10-90
Working Temperature(°C): -20?~+55?
Net Weight (kg): 0.6
Waterproof Level: IP65

Additional Features:
Features: Weatherproof, Plug and Play, IR-Cut,
Remote Viewing, Motion Detection
IR Distance (m): 25-30m
IR Night Vision Distance (m): 30
Storage Card Slot: Cloud, TF-Card, SD-Card
Maximum SD Card Support (GB): 128
Pan/Tilt-Horizontal: 95
Pan/Tilt-Vertical: 355
Languages: English





Solar PTZ IP Surveillance Camera Specifications

Description

Solar Powered PTZ IP Surveillance Camera

System Function: 2.5 inch Mini speed dome, beautiful appearance.

Adopt high-performance sensor, H.264 compression format, resolution achieve 1920×1080

Infrared Function: 8pcs Array Led(4pcs IR led+4pcs full-color led), IR night vision distance 30M

IP Camera Function: Adopt a high-performance platform, stable, and reliable performance. 4mm Lens, Support Audio function, built-in high sensitivity microphone, and high power horn, support voice two-way intercom/motion warning. Can realize remote monitoring/two-way voice intercom, monitoring distance of 10M, intercom distance 30M.

IP Network Function: Support mobile phone/iPad /PC client , truly realize full compatibility of cable and wireless, users can realize local or remote view real-time screen and control PT rotation/zoom, You can view real-time image and control PT rotation th

Support H.264 Compression Format: Built-in wireless WIFI transmission module, supports 802.11b/g/n wireless network and supports WIFI AP hotspots, Support micro SD card, supporting the biggest 128G TF card, Support mobile detection alarm, alarm push (phone and email push).

PT Control Waterproof Function: Horizontal rotation 355°, tilt rotation 90°(0° ~ 90°), Outdoor , waterproof grade IP66

Support P2P & Video Recording: If you have multiple IP cameras or if you want 24/7 recording
Specifications:

Image: HD 1080P/5.0MP Image Sensor

Video Compression: H.264 /H.265 HD Video Quality & Mass Storage

Frame Rate: 25fps± internet adaptive adjustment

Day/Night: IR-CUT Auto Switch Filter

Memory: TF card (maximum 128G)

Audio: Built-in microphone and speakers,
Support two-way audio

Function: Support FTP, motion alarm, picture push, email alarm

Support System: IOS, Android, P2P

Power Supply: Solar Panel





Biometric Smart door lock

Description

Material

Stainless steel +Iron

Design

Touch Screen

Suitable for

Commercial, Household, apartments, Industrial

Color

Silver / Black

5 in 1 Unlocking

RFID card, passcode, fingerprint, App (TT lock, Tuya), key Card

Size

265*58mm

Supported Operating systems

android, windows, macOS

Working Voltage

4 AAA/1.5V batteries(Normally 9 months)

EPS

USB charge,Waterproof,Double lock

Available door

45-130mm

Alarm


low battery alarm,,Tamper Alarm

Virtual password

20 digit

Password length

6-10 digit

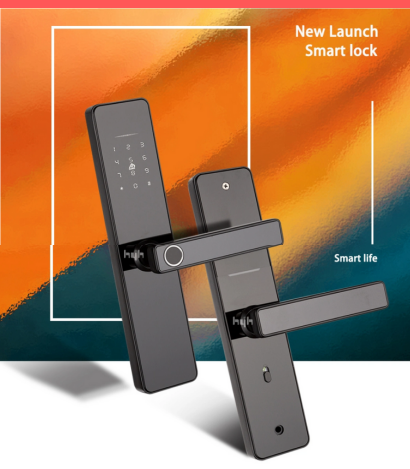



Smart Personal Car tracker

Description

Quick Details

GSM:

850/ 900/ 1800/ 1900 MHz

OS: NO

Use: Automotive

Connection: 2G Sim Card

Function1: SOS alarm and GPS Tracking

Dimensions: 94.0(L)x 51.0(W)x 17.0(H)mm

Function3: Tele-cut off and restart oil/power

Function2: Voice monitoring

GPS: MT3326

Model Number: TR08

Certification: ce,FCC

Brand Name: Greatwill

Acquisition sensitive: -144dBm

Function: Other,GPS TRACKER

Type: GPS Tracker

Placement: Descrete

Product name: Anti-theft gps tracker with sms remote engine stop-TR06N

Combination: Other

GPS antenna: Built-in GSM/GPS high gain antenna

Tracking sensitivity -159dBm

